# Drill Line Spoolers

### Innovative Flexible Material Spooling & Coiling Solutions



#### **Innovation & Safety**


Reel Power has worked closely with drilling contractors and rig manufacturers to specifically design and manufacture Drill Line Spoolers that will improve operator **SAFETY** and **REDUCE** cycle **TIME**.



TUAF-30 Hydraulic



TUAF-30 Pneumatic Tail-boardable with Auto Traverse



TUAF-30 Hydraulic Tail-boardable Skid

#### Available for up to **3,000ft** of <sup>3</sup>/<sub>4</sub>" to over 15,000' of 2" drilling line

EQUIPMENT FEATURES

- » Powered Drill Line Spoolers greatly increase safety by preventing over-run and taking up slack
- » Controllable speed and torque offer increased safety and efficiency
- » Removable shaft allows for quick and easy reel change out
- » Rotating/Drive components are well guarded for added operator safety
- » Heavy-duty seal welded frame ensures durability and long life in oil-field environments
- » Certified pad eyes and/or forklift pockets are available for easy moving



8780 West Road | Houston, TX 77064 | (713) 937-4494 | sales@reelpowerme.com | www.reelpowerme.com

## **Reel Power has over 45 years** of experience in designing and manufacturing Spoolers.

Oilfield products include: Drill Line Spoolers, Offshore Raw Water Reels, Offshore Bulk Transfer Reels, Wireline/Slickline Units, Truck and Trailer Mounted Spoolers, ESP Spoolers, Coiled Tubing Spoolers, Service Loop Spoolers, Seismic Cable Spoolers and Linear Hauloffs/Cable Tensioners.


Equipment can be designed and built for almost any spooling application.


Drill	Lino		Pool Consoity				Total Weight
Size in. (mm)	Length ft. (km)	Max Flange Diameter in. (m)	Max Outside Width in. (m)	W in.	L in.	H in.	Approx. Loaded Ibs. / kg
1 (25.4)	5000 (1.5)	60 (1.5)	42 (1.1)	61	85	72	15,000/6803
1 <sup>1</sup> /8 (28.6)	5000 (1.5)	80 (2.0)	55 (1.4)	61	96	85	16,600/7530
1³/8 (34.9)	7500 (2.3)	90 (2.3)	62 (1.6)	49	96	84	34,200/15,513
1³/4 (44.5)	7500 (2.3)	100 (2.5)	70 (1.8)	97	108	109	55,500/25,174
1³/4 (44.5)	10,000 (3.0)	108 (2.74)	76 (1.9)	108	96	120	72,000/32,659
2 (50.8)	10,000 (3.0)	120 (3.0)	80 (2.0)	97	133	97	95,000/43,091
2 (50.8)	15,000 (4.6)	128 (3.3)	85 (2.2)	97	132	144	132,000/59,874
	Size in. (mm) 1 (25.4) 1 <sup>1</sup> /8 (28.6) 1 <sup>3</sup> /8 (34.9) 1 <sup>3</sup> /4 (44.5) 1 <sup>3</sup> /4 (44.5) 2 (50.8)	in. (mm) ft. (km)   1 (25.4) 5000 (1.5)   1 <sup>1</sup> /8 (28.6) 5000 (1.5)   1 <sup>3</sup> /8 (34.9) 7500 (2.3)   1 <sup>3</sup> /4 (44.5) 7500 (2.3)   1 <sup>3</sup> /4 (44.5) 10,000 (3.0)   2 (50.8) 10,000 (3.0)	Size in. (mm) Length ft. (km) Max Flange Diameter in. (m)   1 (25.4) 5000 (1.5) 60 (1.5)   1 <sup>1</sup> /8 (28.6) 5000 (1.5) 80 (2.0)   1 <sup>3</sup> /8 (34.9) 7500 (2.3) 90 (2.3)   1 <sup>3</sup> /4 (44.5) 7500 (2.3) 100 (2.5)   1 <sup>3</sup> /4 (44.5) 10,000 (3.0) 108 (2.74)   2 (50.8) 10,000 (3.0) 120 (3.0)	Size in. (mm) Length ft. (km) Max Flange Diameter in. (m) Max Outside Width in. (m)   1 (25.4) 5000 (1.5) 60 (1.5) 42 (1.1)   1 <sup>1</sup> /8 (28.6) 5000 (1.5) 80 (2.0) 55 (1.4)   1 <sup>3</sup> /8 (34.9) 7500 (2.3) 90 (2.3) 62 (1.6)   1 <sup>3</sup> /4 (44.5) 7500 (2.3) 100 (2.5) 70 (1.8)   1 <sup>3</sup> /4 (44.5) 10,000 (3.0) 108 (2.74) 76 (1.9)   2 (50.8) 10,000 (3.0) 120 (3.0) 80 (2.0)	Size in. (mm) Length ft. (km) Max Flange Diameter in. (m) Max Outside width in. (m) W   1 (25.4) 5000 (1.5) 60 (1.5) 42 (1.1) 61   11/8 (28.6) 5000 (1.5) 80 (2.0) 55 (1.4) 61   13/8 (34.9) 7500 (2.3) 90 (2.3) 62 (1.6) 49   13/4 (44.5) 7500 (2.3) 100 (2.5) 70 (1.8) 97   13/4 (44.5) 10,000 (3.0) 108 (2.74) 76 (1.9) 108   2 (50.8) 10,000 (3.0) 120 (3.0) 80 (2.0) 97	Size in. (mm) Length ft. (km) Max Flange Diameter in. (m) Max Outside Width in. (m) W L   1 (25.4) 5000 (1.5) 60 (1.5) 42 (1.1) 61 85   1 <sup>1</sup> /8 (28.6) 5000 (1.5) 80 (2.0) 55 (1.4) 61 96   1 <sup>3</sup> /8 (34.9) 7500 (2.3) 90 (2.3) 62 (1.6) 49 96   1 <sup>3</sup> /4 (44.5) 7500 (2.3) 100 (2.5) 70 (1.8) 97 108   1 <sup>3</sup> /4 (44.5) 10,000 (3.0) 108 (2.74) 76 (1.9) 108 96   2 (50.8) 10,000 (3.0) 120 (3.0) 80 (2.0) 97 133	Size in. (mm) Length ft. (km) Max Flange Diameter in. (m) Max Outside Width in. (m) W L H   1 (25.4) 5000 (1.5) 60 (1.5) 42 (1.1) 61 85 72   1/8 (28.6) 5000 (1.5) 80 (2.0) 55 (1.4) 61 96 85   1³/a (34.9) 7500 (2.3) 90 (2.3) 62 (1.6) 49 96 84   1³/4 (44.5) 7500 (2.3) 100 (2.5) 70 (1.8) 97 108 109   1³/4 (44.5) 10,000 (3.0) 108 (2.74) 76 (1.9) 108 96 120   2 (50.8) 10,000 (3.0) 120 (3.0) 80 (2.0) 97 133 97

#### **Equipment Options:**

- » Automatic levelwind to guide materials onto reel
- » On-board winch for ease of string-up/string-down
- » Operator platform for added operator safety
- » Tail-boardable for faster land rig moves
- » Heavy-duty reel(s) specifically designed for storing drill line

- » Rewind service (wind drill line onto spooler/reel prior to shipping)
- » API carbon steel drill line pre-loaded on unit
- » Split bearings for easier reel loading
- » Pneumatic, hydraulic and electric driven units available

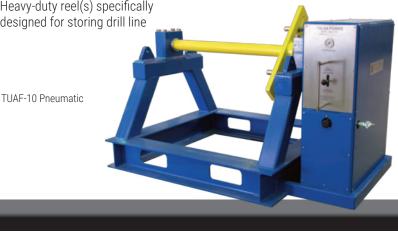

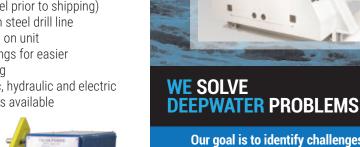

Our goal is to identify challenges, design innovative solutions and manufacture quality products that solve your deepwater problems. Our business is saving you time and money.

TUAF-30 Hydraulic Offshore

**ReelPowerME.com** 



8780 West Road | Houston, TX 77064 | (713) 937-4494 | sales@reelpowerme.com | www.reelpowerme.com